
ENGINEERING
FLOORING

E F

Engineering FLOORING

ORIGINAL wood project a sleek, stylish and modern appeal for stunning visual effect. The clean lines of these wood are perfect in lending a contemporary finish to any décor.


VILLA wood convey an aura of warmth with subtle hues and vivid indication of grain patterns highlighting the knotty characteristic of the wood.

CLASSIC wood are elegant and timeless, processing a rich beauty that endures for the ages. These versatile wood can be used for both traditional and modern setting. They are exemplified by minimal color variation and few knots.

COUNTRY wood create an effect reminiscent of cozy cottages and hunting lodges with roaring fireplaces and all - round comfort. The wonderful rustic charm is enhanced by board variations in the grain, color and distinctive knots.



T & G



LOC


Thickness: 14mm and 22mm

Options:

Aluminium oxide or antiscratch

Gloss level 8%, 25% or 50%

Micro beveled (royal, imperial and more)

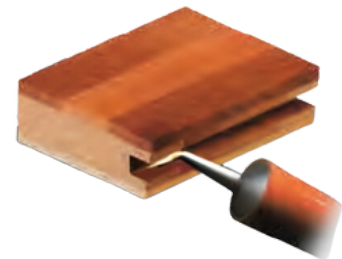

	ROYAL 190 × 2190MM / 1830
	IMPERIAL 138 × 2190MM / 1830
	NOBLE 125 × 2190MM / 1830
	PRIME 125 × 2190MM / 1830
	REGAL 125 × 2190MM / 1830
	FINELINE 125 × 2190MM / 1830

Pattern & Dimensions




Multi layer finish with options of
varnish / oil / oil-wax


hardwood wear surface

core layer using PINE / HEVEA

softwood veneer

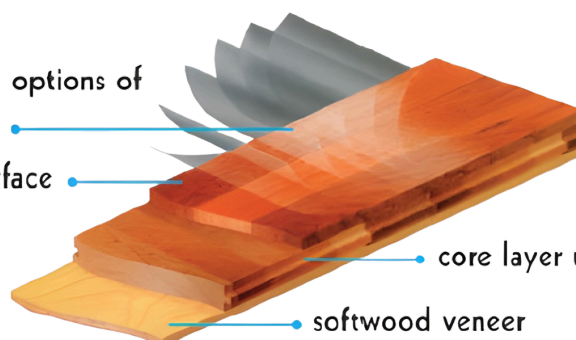


Exotic Collection

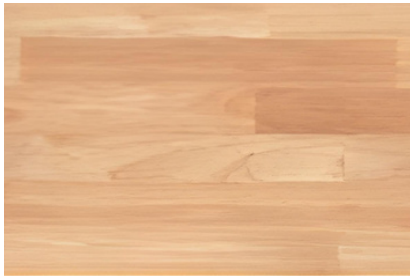


Hevea




Kempas

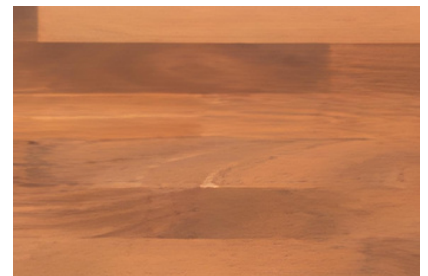

Merbau

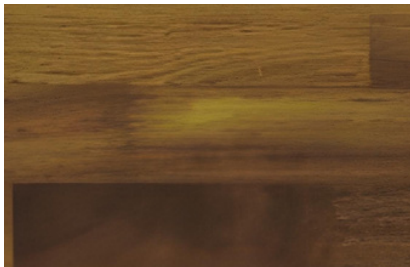


Iroko

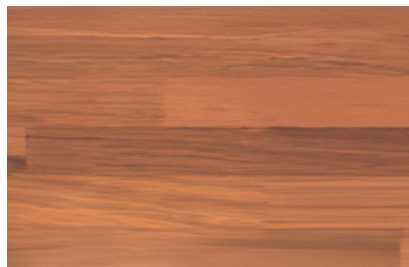


Jatoba


Australian Collection

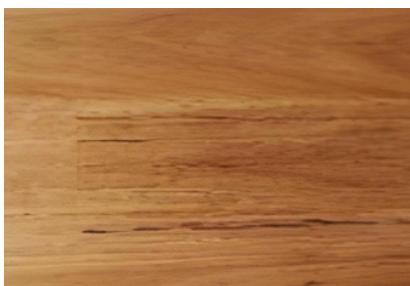

BlackButt

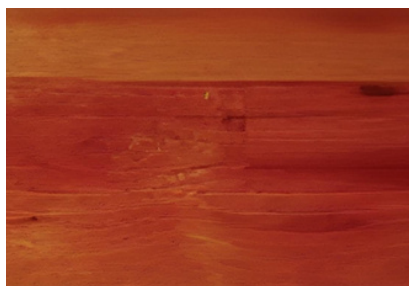

Blue Gum

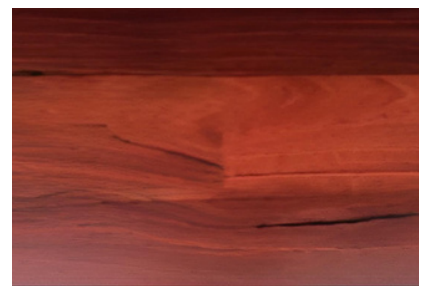

Jarrah



Spotted Gum



Tasmanian Oak


American Collection



Cherry




Maple

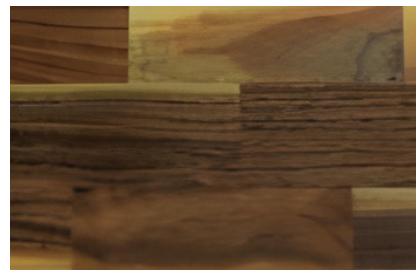

Walnut

European Collection

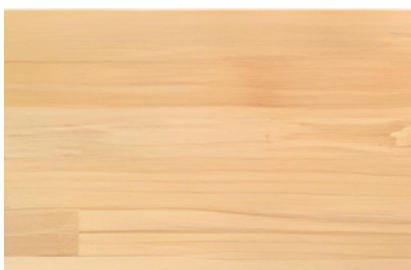

Ash



White Oak

Finline Collection



Oak



Sepetir

Natural Hardwood Floors



Residential and Light Commercial

- Suitable to use in residential and light commercial



Wear Resistance

- Superior multiple UV coating system exclusively by BONA with life time support



Slip Resistance

- Comply to CE standard with high anti-slip properties



Scratch Resistant

- Treated with multiple UV acrylic with anti-scratch top coat



Fire Resistance

- Achieved Cfl-S1 classification in accordance with EN13501-I



Low Formaldehyde Emission

- Achieved E1 and E0 standard which exempt from the world's leading formaldehyde emission standards and regulations



Hygienic and Easy to Clean

- Totally resistance to a range of house-hold chemicals so easy to maintain and clean than ordinary floors



High Durability

- Offer outstanding durability to make the floors last with low maintenance systems



Easy Installation

- 5G-C Valinge patented click system makes nstallation faster and easier with glue-free technology



LOT 1614 - 1615, BLOCK 6, JALAN TUDAN
TECHNOLOGY PARK, BANDAR BARU PERMYJAYA,
MIRI



WWW.AMHOMEFLOORING.COM



AMHOME. FLOORING & WINDOW BLINDS



AMHOME_FLOORING
